



## TECHNICAL PARAMETERS Vibration exciter S 51165-IN

Rated peak force Sine <sub>pk</sub> /Random <sub>RMS</sub>	650/420 N
Frequency range	2-2000 Hz
Max. displacement Peak-Peak	9 mm
Max. velocity Sine/Random	1.5/1.5 m/s
Max. acceleration Sine/Random	2.8/1.8 g
Suspension stiffness	98 N/mm
Effective moving mass	0.97 kg
Weight	26 kg
Coupling thread	M12

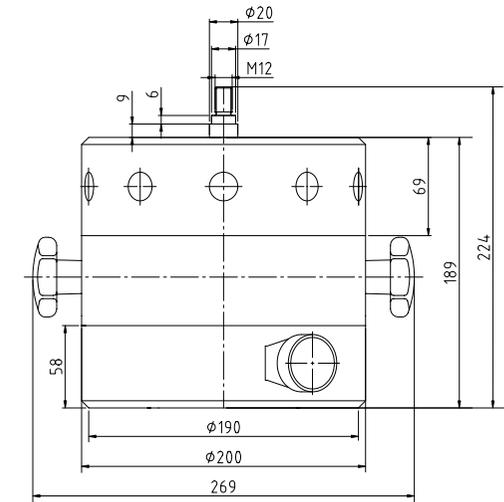

## SCOPE OF DELIVERY, OPTIONS AND FEATURES OF THE SYSTEM

<p><b>Scope of delivery:</b>          Vibration exciter 650 N          Power amplifier 1200 VA          Cooling blower          Connection cable (5 m)          Power cable amplifier (1.5 m)          Blower hose ø40 mm (3 m)</p>	<p><b>Options:</b>          Rack for mounting the amplifier          Remote control (Hardware)          Silencer              for cooling blower (Noise reduction up to 8 dB(A))          Acoustic enclosure              for cooling blower (Noise reduction 15 - 23 dB(A))          Cable extension          Factory acceptance test</p>	<p><b>Features:</b>          Coarse filter unit          Automatic centering of the armature          High cross-axial stiffness          Light weight construction by using rare earth magnet          Minimum maintenance effort          Made in Germany          Servicehotline</p>
---	--	---

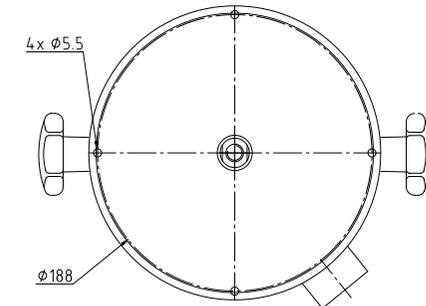

## TECHNICAL PARAMETERS Amplifier BAA 1000

Output power <sub>RMS</sub>	1200 VA
Frequency range	2 Hz - 20 kHz
Voltage <sub>RMS</sub> max.	72 V
Current <sub>RMS</sub> max.	18 A
Signal input voltage <sub>RMS</sub>	< 5 V
Distortion	< 0.1 %
Signal to noise ratio	> 90 dB
Weight	45 kg
Dimensions (WxHxD)	483 x 190 x 600 mm
Power supply (Standard)	1 ~ / N / PE 230 V ±5% 50 Hz, CEE 7/7
Recommended fuse protection (Standard)	16 A slow
Max. power consumption at 230 V	1.27 kVA
Interlocks:	Overload, temperature, clipping and more

### Features:

High Signal to noise ratio of >90 dB

## TECHNICAL PARAMETERS Cooling blower TB 0140

Volume flow rate	max. 140 m <sup>3</sup> /h
Total pressure difference	max. 120 mbar
Power	1.1 kW
Frequency	50 Hz
Hose diameter	50 mm
Hose length (Std.)	3 m
Weight	16 kg
Dimensions (WxHxD)	286 x 302 x 292 mm
Sound pressure level, max.	max. 63 dB(A)
Power supply (Standard)	1 ~ / N / PE 230 V ±5% 50 Hz, CEE 7/7
Max. power consumption at 400 V	1.4 kVA

### Options:

Silencer (Noise reduction up to 8 dB(A))

Dimensions (LxD): 308 x 82 mm



Weight: 0.2 kg

Acoustic enclosure (Noise reduction 15 - 23 dB(A))

Dimensions (WxHxD): 795 x 841 x 699 mm

Weight: 45 kg

Hose length according to customers request (up to 10 m)

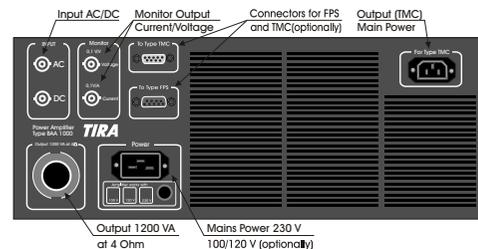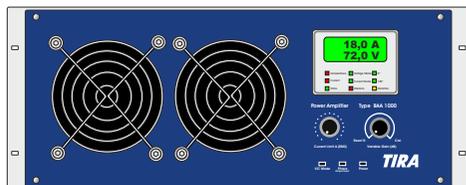

Cooling blower TB 0140



Silencer TB 0140-SI (optional)



Acoustic enclosure TB 0140-AE (optional)