



## TECHNICAL PARAMETERS Modal exciter S 51120-M

Rated peak force Sine <sub>pk</sub> /Random <sub>RMS</sub>	200/140 N
Frequency range	DC-5000 Hz
Main resonance frequency (free-swinging)	>2680 Hz
Max. displacement Peak-Peak	13 mm
Max. velocity Sine/Random	1.5/1.5 m/s
Suspension stiffness	8 N/mm
Effective moving mass	0.23 kg
Weight	12 kg
Coupling thread	M6

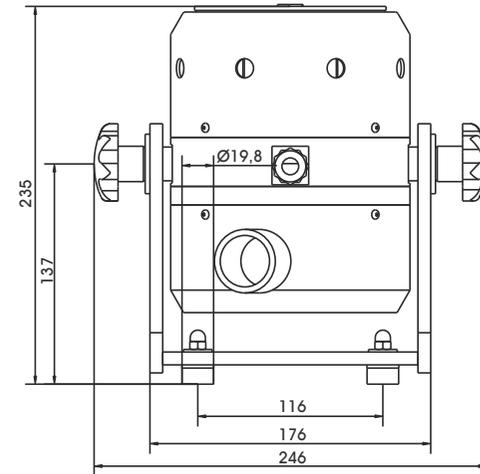

## SCOPE OF DELIVERY, OPTIONS AND FEATURES OF THE SYSTEM

<p><b>Scope of delivery:</b>          Modal exciter 200 N          Trunnion mount          Power amplifier 500 VA          Cooling blower          Connection cable (3 m)          Power cable amplifier (1.5 m)          Blower hose ø40 mm (3 m)</p>	<p><b>Options:</b>          Rack for mounting the amplifier          Remote control (Hardware)          Silencer              for cooling blower (Noise reduction up to 5 dB(A))          Acoustic enclosure              for cooling blower (Noise reduction 15 - 23 dB(A))          Cable extension          Factory acceptance test</p>	<p><b>Features:</b>          Vibration isolation          Coarse filter unit          Automatic centering of the armature          High cross-axial stiffness          Light weight construction by using rare earth magnet          Minimum maintenance effort          Made in Germany          Servicehotline</p>
--	--	--

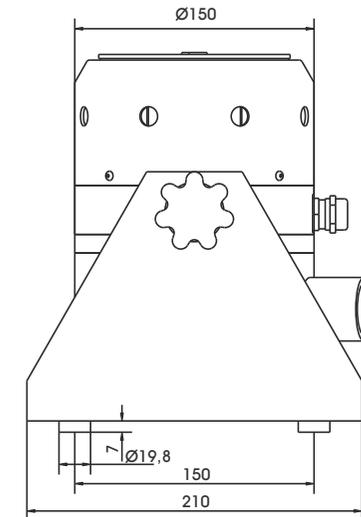

## TECHNICAL PARAMETERS Amplifier BAA 500


Output power <sub>RMS</sub>	500 VA
Frequency range	DC - 20 kHz
Voltage-/Current mode	yes/yes
Voltage <sub>RMS</sub> max	45 V
Current <sub>RMS</sub> max.	11.2 A
Signal input voltage <sub>RMS</sub>	< 5 V
Distortion	< 0.1 %
Signal to noise ratio	> 90 dB
Weight	25 kg
Dimensions (WxHxD)	483 x 90 x 450 mm
Power supply (Standard)	1 ~ / N / PE 230 V ±5% 50 Hz, CEE 7/7
Recommended fuse protection (Standard)	16 A slow
Max. power consumption at 230 V	0.35 kVA
Interlocks:	Overload, temperature, clipping and more

**Features:**  
High Signal to noise ratio of >90 dB

## TECHNICAL PARAMETERS Cooling blower TB 0080

Volume flow rate	max. 80 m³/h
Total pressure difference	max. 120 hPa
Power	0.37 kW
Frequency	50 Hz
Hose diameter	40 mm
Hose length (Std.)	3 m
Weight	10 kg
Dimensions (WxHxD)	246 x 256 x 247 mm
Sound pressure level, max.	max. 53 dB(A)
Power supply (standard)	1 ~ / N / PE 230 V ±5% 50 Hz, CEE 7/7
Max. power consumption at 230 V	0.46 kVA

**Options:**  
 Silencer TB 0080-SI (Noise reduction up to 5 dB(A))  
 Dimensions (LxD): 310 x 65 mm  
 Weight: 0.2 kg  
 Acoustic enclosure TB 0080-AE (Noise reduction 15 - 23 dB(A))  
 Dimensions (WxHxD): 795 x 841 x 699 mm  
 Weight: 45 kg  
 Hose length according to customers request (up to 10 m)

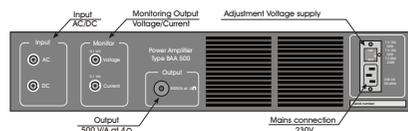

Cooling blower TB 0080



Silencer TB 0080-SI (optional)



Acoustic enclosure TB 0080-AE (optional)