
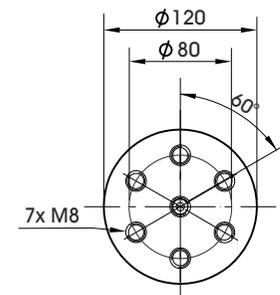
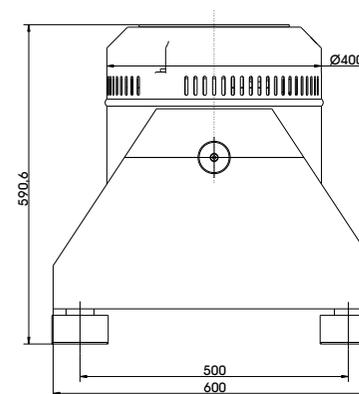


TECHNICAL PARAMETERS Vibration exciter S 50303/LS-120

Rated peak force Sine _{pk} /Random _{RMS} /Shock _{pk} ¹	2000/1000/4000 N
Frequency range	2-4000 Hz
Main resonance frequency	>3700 Hz
Max. displacement Peak-Peak ²	45.0 mm
Max. velocity Sine/Random/Shock	1.5/1.5/2.0 m/s
Max. acceleration Sine/Random/Shock ¹	72/36/144 g
Suspension stiffness	electronically adjustable
Effective moving mass	3.0 kg
Max. weight tested	25 kg
Weight	280 kg
Magn. stray field without/with degaussing	<8.5/<1 mT
Armature diameter	120 mm
Interlocks	Temperature, displacement, cooling air, overcurrent

1) theoretical maximum shock value. Depends on payload, amplifier, shock and shock width
2) impact by moving to static mass and frequency is possible

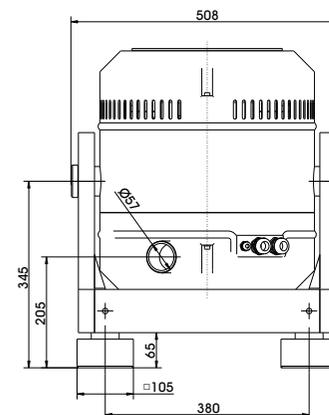

Armature (Standard)

SCOPE OF DELIVERY, OPTIONS AND FEATURES OF THE SYSTEM

<p>Scope of delivery: Vibration exciter 2 kN Trunnion mount Power amplifier 2.7 kVA Cooling blower Connection cables (each 5 m) Power cables (5 m) for amplifier (CEE 16 connector) Blower hose ø60 mm (5 m)</p>	<p>Options: Different hole pattern of armature (different pitch diameter and/or thread inserts) at customers request Degauss kit to reduce stray magnetic field Squeak&Rattle (Silent operation without blower) Thermobarrier (-40°C to +140°C) Chamber leadthrough Remote control (Software) Silencer for cooling blower (Noise reduction up to 6 dB(A)) Acoustic enclosure for cooling blower (Noise reduction 15 - 23 dB(A)) Cable extension Factory acceptance test</p>	<p>Options: TIRA EMS Energy Management System Operation with temperature-controlled cooling blower (and optional with variable field strength)</p> <p>Features: Vibration isolation < 6 Hz Coarse filter unit Fully automatic electronic load compensation Electronic zero point regulation with adjustable stiffness Automatic centering of the armature Made in Germany Servicehotline</p>
---	--	---

TECHNICAL PARAMETERS Amplifier A 1 01 1 003 T

Output power _{RMS}	2700 VA
Frequency range	DC - 4 kHz
Voltage _{RMS} , max.	105 V
Current _{RMS} , max.	25 A
Signal input voltage _{RMS} (switchable)	2.5/5/10 V
Distortion	< 0.5 %
Signal to noise ratio	> 90 dB
Field voltage, max.	100 V
Field current, max.	6 A
Weight	234 kg
Dimensions (WxHxD)	600 x 1800 x 800 mm
Power supply (Standard)	3~ / N / PE 400 V±5% 50 Hz, CEE 16
Recommended fuse protection (Standard)	16 A slow
Max. power consumption at 400 V (incl. blower)	5 kVA
Interlocks:	Overload, temperature, clipping and more
Features:	
High Signal to noise ratio of >90 dB	Noise-button
Field supply integrated	Input voltage analyzer
Mains switch and integrated line filter	Voltage clipping limiter to avoid clipping
ESD-monitoring	3 Sigma peak current
(Protection of the system against damage)	Electronic zero-point-regulation (TMC)
Field voltage/Field current variable according to customer spec.	

TECHNICAL PARAMETERS Cooling blower TB 0200

Volume flow rate	max. 210 m³/h
Total pressure difference	max. 200 mbar
Power	2.2 kW
Frequency	50 Hz
Hose diameter	60 mm
Hose length (Std.)	5 m
Weight	25 kg
Dimensions (WxHxD)	334 x 337 x 346 mm
Sound pressure level, max.	max. 64 dB(A)
Power supply (standard)	by amplifier rack
Max. power consumption at 400 V	3 kVA
Options:	
Silencer TB 0200-SI (Noise reduction up to 6 dB(A))	Dimensions (LxD): 308 x 82 mm
	Weight: 0.58 kg
Acoustic enclosure TB 0200-AE (Noise reduction 15 - 23 dB(A))	Dimensions (WxHxD): 795 x 841 x 836 mm
	Weight: 55 kg
Hose length according to customers request (up to 10 m)	



Cooling blower TB 0200



Silencer TB 0200-SI (optional)



Acoustic enclosure TB 0200-AE (optional)