
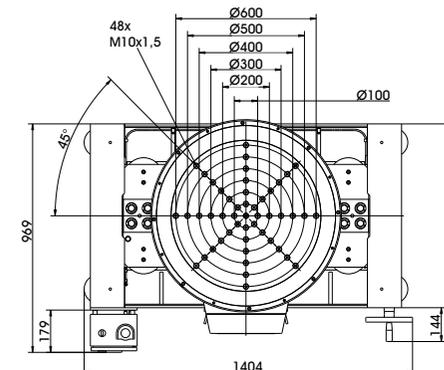
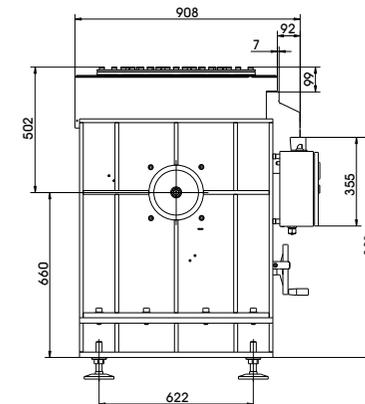


**TECHNICAL PARAMETERS** Vibration exciter S 59335/\*-640

Rated peak force Sine <sub>pk</sub> /Random <sub>RMS</sub> /Shock <sub>pk</sub> <sup>1</sup>	35000/32000/105000 N
Frequency range	5 - 2000 Hz
Main resonance frequency	2000 Hz
Max. displacement Peak-Peak	50.8 mm
Max. velocity Sine/Random/Shock	2.0/1.8/2.5 m/s
Max. acceleration Sine/Random/Shock <sup>1</sup>	70/63/160 g
Suspension stiffness	200 N/mm
Effective moving mass	40.5 kg
Max. weight tested	610 kg
Weight with trunnion RIT/AIT/LB*	2350/2700/2250 kg
Magn. stray field std./low degaussing	<2/<1 mT
Armature diameter	640 mm
Required compressed air supply (load-dependent)	600-1000 kPa
Interlocks	Temperature, displacement, cooling air, overcurrent, compressed air

1) theoretical maximum shock value. Depends on payload, amplifier, shock and shock width  
\* RIT, AIT or LB

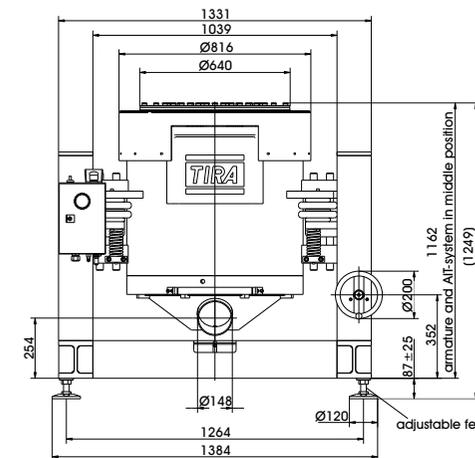

**SCOPE OF DELIVERY, OPTIONS AND FEATURES OF THE SYSTEM**

**Scope of delivery:**  
 Vibration exciter 35 kN  
 Trunnion mount (AIT, RIT or LB)  
 Power amplifier 37.5 kVA  
 Cooling blower  
 Frequency converter  
 Connection cables (each 10 m)  
 Power cables (10 m)  
 for amplifier (CEE 63 connector) and  
 cooling blower (CEE 32 connector)  
 Blower hose ø150 mm (5 m)  
 Compressed-air hose NW 7,2 (Standard) (5 m)

**Options:**  
 Different hole pattern of armature  
 (different pitch diameter and/or thread inserts)  
 at customers request

**Options:**  
 AIT-trunnion mount  
 with integrated vibration isolation  
 RIT-trunnion mount  
 LB-frame  
 Low degaussing kit to further reduce stray magnetic field  
 Airglide-option (Shaker movable on air cushions)  
 Wheels&Rails (incl. 3m rails)  
 Thermobarrier (-40°C to +140°C)  
 Chamber leadthrough  
 Climatic chamber support kit  
 Remote control (Software)  
 Silencer  
 for cooling blower (Noise reduction 9 - 15 dB(A))  
 Acoustic enclosure  
 for cooling blower (Noise reduction 5 - 23 dB(A))  
 Water-cooled acoustic enclosure  
 for cooling blower (Noise reduction 30 dB(A))  
 Cable extension  
 Factory acceptance test

**Options:**  
 Energy Management System

Operation with temperature-controlled  
 cooling blower (and optional with variable  
 field strength)

**Features:**  
 Vibration isolation < 3 Hz (AIT)  
 < 6 Hz (RIT;LB)  
 Coarse filter unit  
 Fully automatic pneumatic load compensation  
 AIT fixable  
 Automatic centering of the AIT-System and  
 the armature  
 Degauss kit to reduce stray magnetic field  
 Made in Germany  
 Servicehotline

## TECHNICAL PARAMETERS Amplifier A 3 08 3 057

Output power <sub>RMS</sub>	37500 VA
Frequency range	DC - 4 kHz
Voltage <sub>RMS</sub> , max.	150 V
Current <sub>RMS</sub> , max.	375 A
Signal input voltage <sub>RMS</sub> (switchable)	2.5/5/10 V
Distortion	< 0.7 %
Signal to noise ratio	> 90 dB
Field voltage, max.	105 V
Field current, max.	75 A
Weight	640 kg
Dimensions (WxHxD)	600 x 2200 x 800 mm
Power supply (Standard)	3~ / N / PE 400 V±5% 50 Hz, CEE 63
Recommended fuse protection (Standard)	63 A slow
Max. power consumption at 400 V	38 kVA
Interlocks:	Overload, temperature, clipping and more
<b>Features:</b>	
High Signal to noise ratio of >90 dB	Lo-Field/Hi-Field button (Energy-saving mode)
Field supply integrated	Noise-button
Mains switch and integrated line filter	Input voltage analyzer
ESD-monitoring	Voltage clipping limiter to avoid clipping
(Protection of the system against damage)	3 Sigma peak current
Field voltage/Field current variable according to customer spec.	

## TECHNICAL PARAMETERS Cooling blower TB 7/FUK/11

Max. volume flow rate	1920 m³/h
Max. total pressure difference	16 kPa
Motor output	11 kW
Max. frequency	105 Hz
Hose diameter	150 mm
Hose length (Std.)	5 m
Weight	113 kg
Dimensions (WxHxD)	625 x 775 x 602 mm
Max. sound pressure level	102 dB(A)
<b>Frequency converter (fixation to wall):</b>	
Weight	10 kg
Dimensions (WxHxD)	300 x 300 x 250 mm
Power supply (variable)	3~ / PE 400 V±5% 50 Hz, CEE 32
Recommended fuse protection (Standard)	35 A slow
Max. power consumption at 400 V	17.5 kVA
<b>Options:</b>	
Silencer TB 7/FUK-SI (Noise reduction 9 - 15 dB(A))	
Dimensions (LxD):	1120 x 280 mm
Weight:	9.2 kg
Acoustic enclosure TB 7/FUK-AE (Noise reduction 5 - 23 dB(A))	
Dimensions (WxHxD):	1130 x 1630 x 1630 mm
Weight:	103 kg
Water-cooled acoustic enclosure WWT (Noise reduction 30 dB(A))	
Dimensions (WxHxD):	1500 x 2080 x 1200 mm
Weight:	800 kg
Hose length according to customers request (up to 10 m)	



Frequency converter (enclosure)



Cooling blower TB 7/FUK/11



Silencer TB 7/FUK-SI (optional)



Acoustic enclosure TB 7/FUK-AE (optional)