
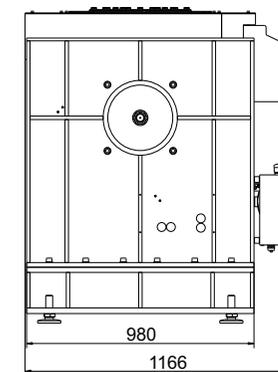


TECHNICAL PARAMETERS Vibration exciter S 59349/AIT-640

Rated peak force Sine _{pk} /Random _{RMS} /Shock _{pk} ¹	49500/48000/1 48500 N
Frequency range	5 - 2000 Hz
Main resonance frequency	2000 Hz
Max. displacement Peak-Peak	50.8 mm
Max. velocity Sine/Random/Shock	2.0/2.0/2.5 m/s
Max. acceleration Sine/Random/Shock ¹	70/70/160 g
Suspension stiffness	200 N/mm
Effective moving mass	55.0 kg
Max. weight tested	910 kg
Weight with trunnion	4550 kg
Magn. stray field std./low degaussing	<2/<1 mT
Armature diameter	640 mm
Min. required compressed air supply	600 kPa
Interlocks	Temperature, displacement, cooling air, overcurrent, compressed air

1) theoretical maximum shock value. Depends on payload, amplifier, shock and shock width

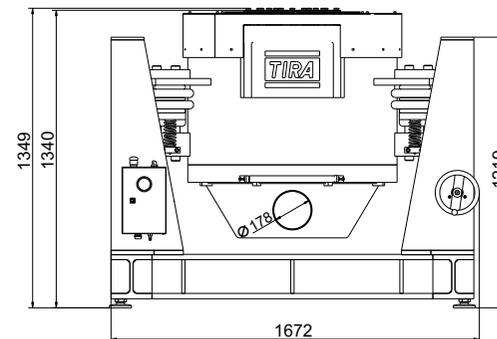

SCOPE OF DELIVERY, OPTIONS AND FEATURES OF THE SYSTEM


Scope of delivery:
 Vibration exciter 49.5 kN
 Trunnion mount
 with integrated vibration isolation (AIT)
 Power amplifier 60 kVA
 Cooling blower
 Frequency converter
 Connection cables (each 10 m)
 Power cables (10 m)
 for amplifier (direct connection) and cooling blower (CEE 63 connector)
 Blower hose ø175 mm (5 m)
 Compressed-air hose NW 7,2 (Standard) (5 m)

Options:
 Different hole pattern of armature (different pitch diameter and/or thread inserts) at customers request
 Low degaussing kit to further reduce stray magnetic field
 Airglide-option (Shaker movable on air cushions)
 Wheels&Rails (incl. 3m rails)
 Thermobarrier (-40°C to +140°C)
 Chamber leadthrough
 Climatic chamber support kit
 Remote control (Software)
 Silencer
 for cooling blower (Noise reduction 9 - 15 dB(A))
 Acoustic enclosure
 for cooling blower (Noise reduction 5 - 23 dB(A))
 Water-cooled acoustic enclosure
 for cooling blower (Noise reduction 30 dB(A))
 Cable extension
 Factory acceptance test

Options:
TIRA EMS Energy Management System

Operation with temperature-controlled cooling blower (and optional with variable field strength)

Features:
 AIT-trunnion mount
 with integrated vibration isolation < 3 Hz
 Coarse filter unit
 Fully automatic pneumatic load compensation
 AIT fixable
 Automatic centering of the AIT-System and the armature
 Degauss kit to reduce stray magnetic field
 Made in Germany
 Servicehotline



Armature 640 (Standard)

TECHNICAL PARAMETERS Amplifier A 2 11 3 090

Output power _{RMS}	60000 VA
Frequency range	DC - 4 kHz
Voltage _{RMS} , max.	150 V
Current _{RMS} , max.	600 A
Signal input voltage _{RMS} (switchable)	2.5/5/10 V
Distortion	< 0.7 %
Signal to noise ratio	> 90 dB
Field voltage, max.	112 V
Field current, max.	100 A
Weight	860 kg
Dimensions (WxHxD)	1200 x 1800 x 800 mm
Power supply (Standard)	3~ / N / PE 400 V±5% 50 Hz
Recommended fuse protection (Standard)	80 A slow
Max. power consumption at 400 V	52 kVA
Interlocks:	Overload, temperature, clipping and more
Features:	
High Signal to noise ratio of >90 dB	Lo-Field/Hi-Field button (Energy-saving mode)
Field supply integrated	Noise-button
Mains switch and integrated line filter	Input voltage analyzer
ESD-monitoring	Voltage clipping limiter to avoid clipping
(Protection of the system against damage)	3 Sigma peak current
Field voltage/Field current variable according to customer spec.	

TECHNICAL PARAMETERS Cooling blower TB 7/FUK/20

Max. volume flow rate	5820 m³/h
Max. total pressure difference	16 kPa
Motor output	20 kW
Max. frequency	105 Hz
Hose diameter	175 mm
Hose length (Std.)	5 m
Weight	131 kg
Dimensions (WxHxD)	625 x 773 x 602 mm
Max. sound pressure level	105 dB(A)
Frequency converter (fixation to wall):	
Weight	10 kg
Dimensions (WxHxD)	300 x 300 x 250 mm
Power supply (variable)	3~ / PE 400 V±5% 50 Hz CEE 63
Recommended fuse protection (Standard)	50 A slow
Max. power consumption at 400 V	27 kVA
Options:	
Silencer TB 7/FUK-SI (Noise reduction 9 - 15 dB(A))	
Dimensions (LxD):	1120 x 280 mm
Weight:	9.2 kg
Acoustic enclosure TB 7/FUK-AE (Noise reduction 5 - 23 dB(A))	
Dimensions (WxHxD):	1130 x 1630 x 1630 mm
Weight:	103 kg
Water-cooled acoustic enclosure WWT (Noise reduction 30 dB(A))	
Dimensions (WxHxD):	1500 x 2080 x 1200 mm
Weight:	800 kg
Hose length according to customers request (up to 10 m)	



Frequency converter (enclosure)



Cooling blower TB 7/FUK/20



Silencer TB 7/FUK-SI (optional)



Acoustic enclosure TB 7/FUK-AE (optional)