
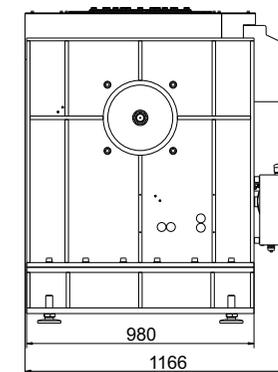


TECHNICAL PARAMETERS Vibration exciter S 59355/AIT-440


Rated peak force Sine _{pk} /Random _{RMS} /Shock _{pk} ¹	55000/51000/165000 N
Frequency range	5 - 2500 Hz
Main resonance frequency	2000 Hz
Max. displacement Peak-Peak ²	50.8 mm
Max. velocity Sine/Random/Shock	2.0/2.0/2.5 m/s
Max. acceleration Sine/Random/Shock ¹	100/100/224 g
Suspension stiffness	200 N/mm
Effective moving mass	45.5 kg
Max. weight tested	910 kg
Weight with trunnion	4550 kg
Magn. stray field std./low degaussing	<1.5/<0.8 mT
Armature diameter	440 mm
Min. required compressed air supply	600 kPa
Interlocks	Temperature, displacement, cooling air, overcurrent, compressed air

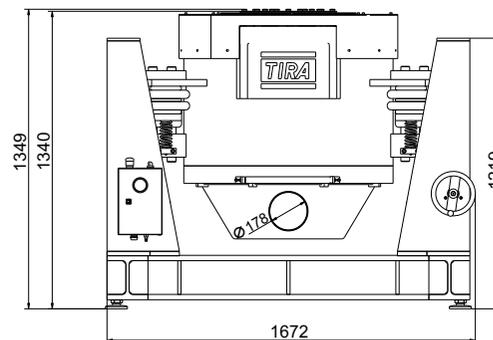

1) theoretical maximum shock value. Depends on payload, amplifier, shock and shock width
2) optional displacement of 76.2 mm (3 inch) for transient applications, 63.5mm (2.5") for Sine and Random.
Impact by moving to static mass and frequency is possible

SCOPE OF DELIVERY, OPTIONS AND FEATURES OF THE SYSTEM

<p>Scope of delivery: Vibration exciter 55 kN Trunnion mount with integrated vibration isolation (AIT) Power amplifier 75 kVA Cooling blower Frequency converter Connection cables (each 10 m) Power cables (10 m) for amplifier (direct connection) and cooling blower (CEE 63 connector) Blower hose ø175 mm (5 m) Compressed-air hose NW 7,2 (Standard) (5 m)</p>	<p>Options: 3 inch (76.2 mm) displacement Different hole pattern of armature (different pitch diameter and/or thread inserts) at customers request Dual Bearing armature Low degaussing kit to further reduce stray magnetic field Airglide-option (Shaker movable on air cushions) Wheels&Rails (incl. 3m rails) Thermobarrier (-40°C to +140°C) Chamber leadthrough Climatic chamber support kit Remote control (Software) Silencer for cooling blower (Noise reduction 9 - 15 dB(A)) Acoustic enclosure for cooling blower (Noise reduction 5 - 23 dB(A)) Water-cooled acoustic enclosure for cooling blower (Noise reduction 30 dB(A)) Cable extension Factory acceptance test</p>	<p>Options: TIRA EMS Energy Management System Operation with temperature-controlled cooling blower (and optional with variable field strength)</p> <p>Features: AIT-trunnion mount with integrated vibration isolation < 3 Hz Coarse filter unit Fully automatic pneumatic load compensation AIT fixable Automatic centering of the AIT-System and the armature Degauss kit to reduce stray magnetic field Made in Germany Servicehotline</p>
---	---	---

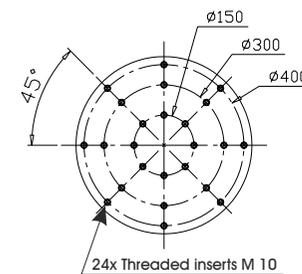

Armature 440 (Standard)

TECHNICAL PARAMETERS Amplifier A 4 11 3 113

Output power _{RMS}	75000 VA
Frequency range	DC - 4 kHz
Voltage _{RMS} , max.	150 V
Current _{RMS} , max.	750 A
Signal input voltage _{RMS} (switchable)	2.5/5/10 V
Distortion	< 0.7 %
Signal to noise ratio	> 90 dB
Field voltage, max.	112 V
Field current, max.	100 A
Weight	910 kg
Dimensions (WxHxD)	1200 x 2200 x 800 mm
Power supply (Standard)	3~ / N / PE 400 V±5% 50 Hz
Recommended fuse protection (Standard)	120 A slow
Max. power consumption at 400 V	62 kVA
Interlocks:	Overload, temperature, clipping and more
Features:	
High Signal to noise ratio of >90 dB	Lo-Field/Hi-Field button (Energy-saving mode)
Field supply integrated	Noise-button
Mains switch and integrated line filter	Input voltage analyzer
ESD-monitoring	Voltage clipping limiter to avoid clipping
(Protection of the system against damage)	3 Sigma peak current
Field voltage/Field current variable according to customer spec.	

TECHNICAL PARAMETERS Cooling blower TB 7/FUK/20

Max. volume flow rate	5820 m³/h
Max. total pressure difference	16 kPa
Motor output	20 kW
Max. frequency	105 Hz
Hose diameter	175 mm
Hose length (Std.)	5 m
Weight	131 kg
Dimensions (WxHxD)	625 x 773 x 602 mm
Max. sound pressure level	105 dB(A)
Frequency converter (fixation to wall):	
Weight	10 kg
Dimensions (WxHxD)	300 x 300 x 250 mm
Power supply (variable)	3~ / PE 400 V±5% 50 Hz CEE 63
Recommended fuse protection (Standard)	50 A slow
Max. power consumption at 400 V	27 kVA
Options:	
Silencer TB 7/FUK-SI (Noise reduction 9 - 15 dB(A))	
Dimensions (LxD):	1120 x 280 mm
Weight:	9.2 kg
Acoustic enclosure TB 7/FUK-AE (Noise reduction 5 - 23 dB(A))	
Dimensions (WxHxD):	1130 x 1630 x 1630 mm
Weight:	103 kg
Water-cooled acoustic enclosure WWT (Noise reduction 30 dB(A))	
Dimensions (WxHxD):	1500 x 2080 x 1200 mm
Weight:	800 kg
Hose length according to customers request (up to 10 m)	



Frequency converter (enclosure)



Cooling blower TB 7/FUK/20



Silencer TB 7/FUK-SI (optional)



Acoustic enclosure TB 7/FUK-AE (optional)