
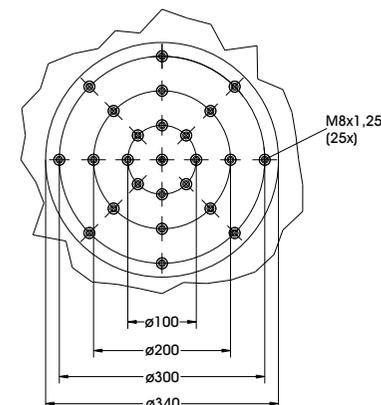
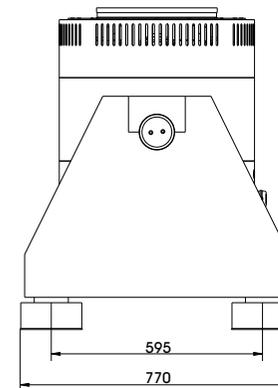


TECHNICAL PARAMETERS Vibration exciter S 56280/LS-340

Rated peak force Sine _{pk} /Random _{RMS} /Shock _{pk} ¹	8000/7200/24000 N
Frequency range	2-3000 Hz
Main resonance frequency	>2600 Hz
Max. displacement Peak-Peak	50.8 mm
Max. velocity Sine/Random/Shock	2.0/2.0/3.5 m/s
Max. acceleration Sine/Random/Shock ¹	88/65/175 g
Suspension stiffness	50 N/mm
Effective moving mass	9.6 kg
Max. weight tested	250 kg
Weight	780 kg
Magn. stray field Std./low degaussing	<1.5/<0.8 mT
Armature diameter	340 mm
Min. required compressed air supply	600 kPa
Interlocks	Temperature, displacement, cooling air, overcurrent, compressed air

¹) theoretical maximum shock value. Depends on payload, amplifier, shock and shock width

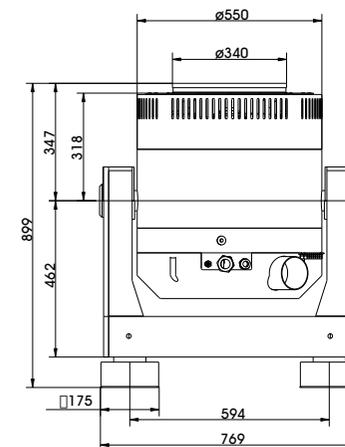

SCOPE OF DELIVERY, OPTIONS AND FEATURES OF THE SYSTEM

<p>Scope of delivery: Vibration exciter 8 kN Trunnion mount Power amplifier 15 kVA Cooling blower Connection cables (each 5 m) Power cables (5 m) for amplifier (CEE 32 connector) Blower hose ø140 mm (5 m) Compressed-air hose NW 7,2 (Standard) (3 m)</p>	<p>Options: Different hole pattern of armature (different pitch diameter and/or thread inserts) at customers request Low degaussing kit to further reduce stray magnetic field Squeak&Rattle (Silent operation without blower) Wheels&Rails (incl. 3m rails) Thermobarrier (-40°C to +140°C) Chamber leadthrough Climatic chamber support kit Remote control (Software) Silencer for cooling blower (Noise reduction 3 - 6 dB(A)) Acoustic enclosure for cooling blower (Noise reduction 5 - 23 dB(A)) Cable extension Factory acceptance test</p>	<p>Options: TIRA EMS Energy Management System Operation with temperature-controlled cooling blower (and optional with variable field strength)</p> <p>Features: Vibration isolation < 6 Hz Coarse filter unit Fully automatic pneumatic load compensation Automatic centering of the armature Degauss kit to reduce stray magnetic field Made in Germany Servicehotline</p>
---	---	--

TECHNICAL PARAMETERS Amplifier A 1 02 3 023

Output power _{RMS}	15000 VA
Frequency range	DC - 4 kHz
Voltage _{RMS} , max.	150 V
Current _{RMS} , max.	150 A
Signal input voltage _{RMS} (switchable)	2.5/5/10 V
Distortion	< 0.7 %
Signal to noise ratio	> 90 dB
Field voltage, max.	280 V
Field current, max.	6 A
Weight	330 kg
Dimensions (WxHxD)	600 x 1800 x 800 mm
Power supply (Standard)	3~ / N / PE 400 V±5% 50 Hz, CEE 32
Recommended fuse protection (Standard)	32 A slow
Max. power consumption at 400 V (incl. blower)	16 kVA
Interlocks:	Overload, temperature, clipping and more
Features:	
High Signal to noise ratio of >90 dB	Noise-button
Field supply integrated	Input voltage analyzer
Mains switch and integrated line filter	Voltage clipping limiter to avoid clipping
ESD-monitoring (Protection of the system against damage)	3 Sigma peak current
Field voltage/Field current variable according to customer spec.	

TECHNICAL PARAMETERS Cooling blower TB 9 FUK

Max. volume flow rate	1080 m³/h
Total pressure difference	9 kPa
Motor output	4 kW
Max. frequency	90 Hz
Hose diameter	140 mm
Hose length (Std.)	5 m
Weight	60 kg
Dimensions (WxHxD)	505 x 598 x 464 mm
Max. sound pressure level	99 dB(A)
Power supply (standard)	by amplifier rack
Max. power consumption at 400 V	5.5 kVA
Options:	
Silencer TB 9-SI (Noise reduction 3-6 dB(A))	Dimensions (LxD): 1012 x 150 mm
	Weight: 1.2 kg
Acoustic enclosure TB 9-AE (Noise reduction 5 - 23 dB(A))	Dimensions (WxHxD): 1094 x 1086 x 1000 mm
	Weight: 134 kg
Hose length according to customers request (up to 10 m)	



Cooling blower TB 9 FUK



Silencer TB 9-SI (optional)



Acoustic enclosure TB 9-AE (optional)